




GharbFlange
Since 1979




REDUCING FLANGES

■ Class 150 - 2500 Reducing Flanges

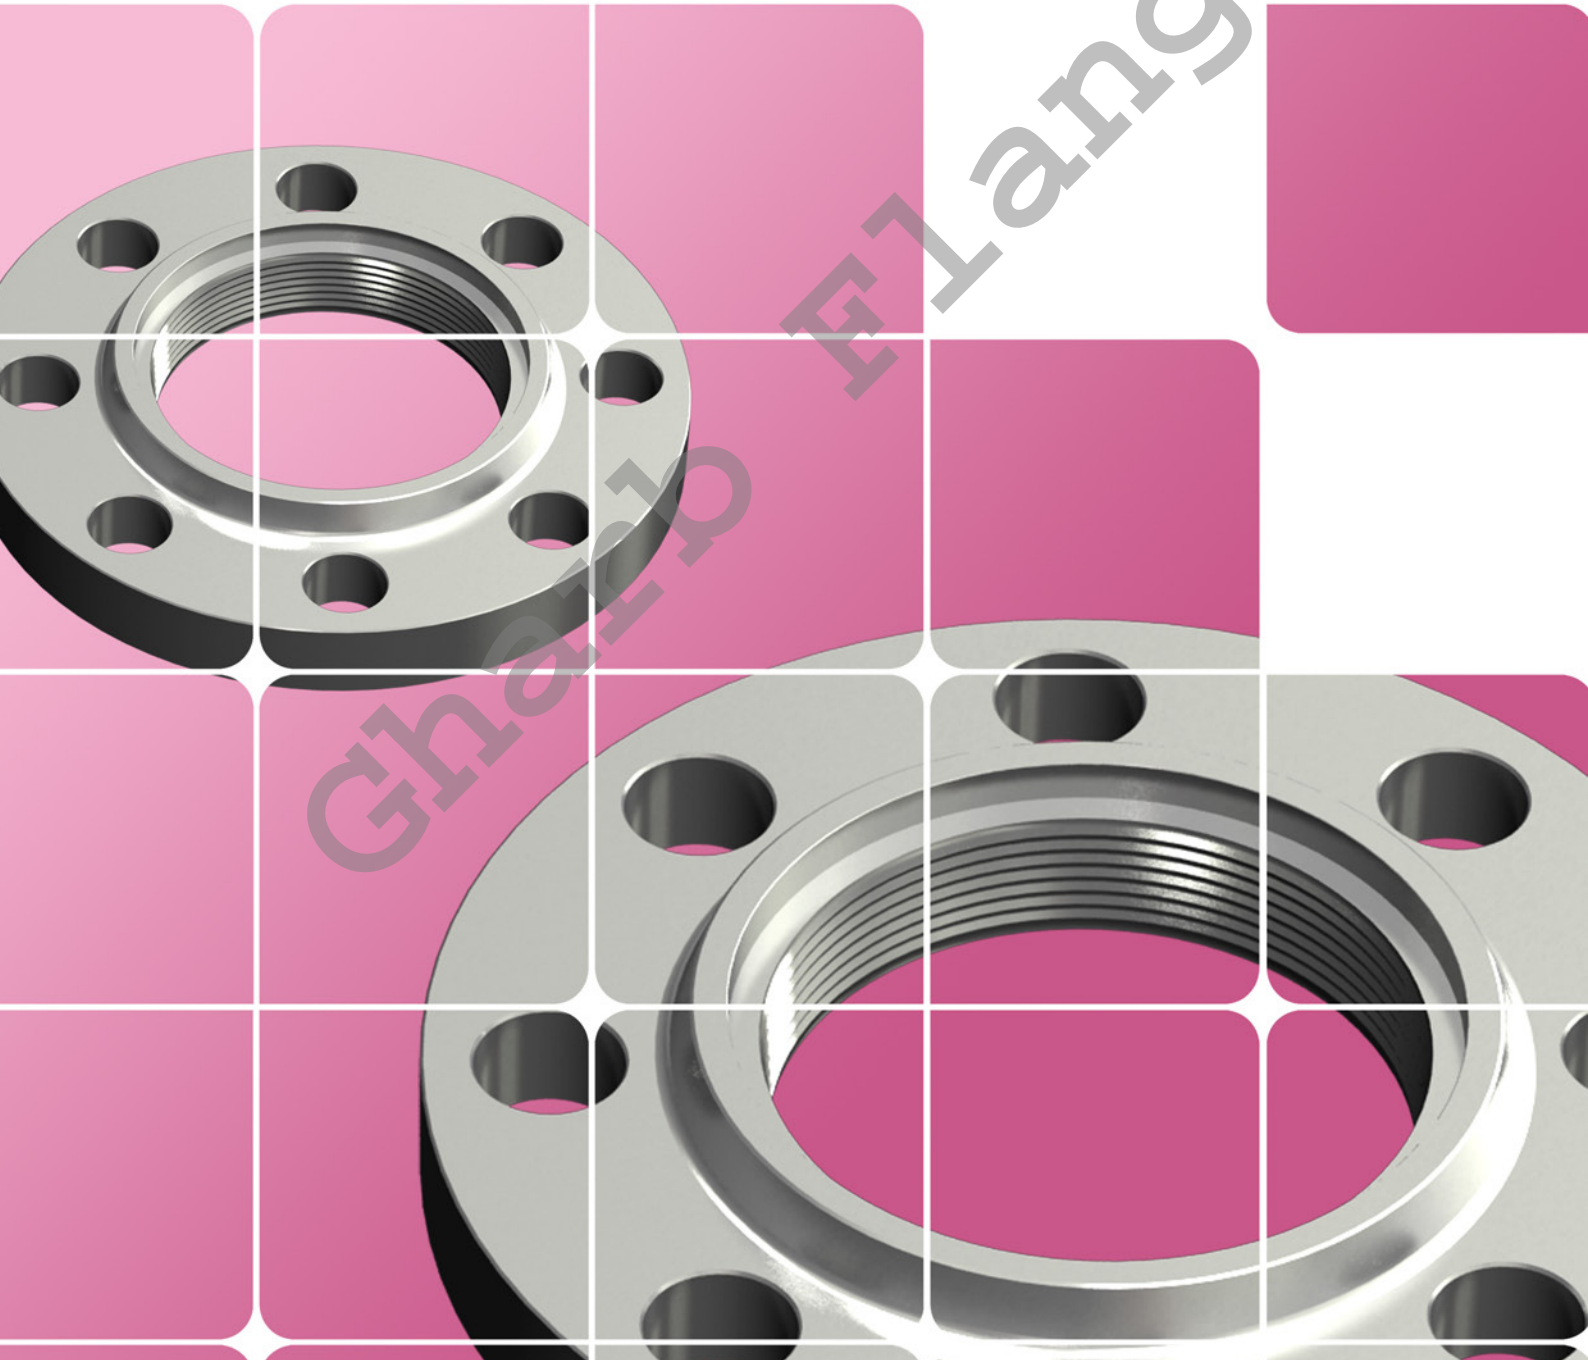





CLASS 150 - 2500 REDUCING FLANGES

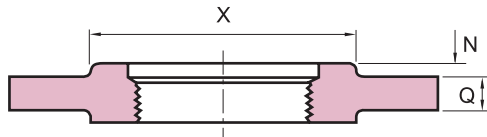


THREADED

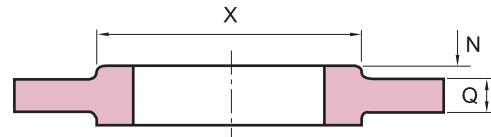

SLIP - ON



THREADED

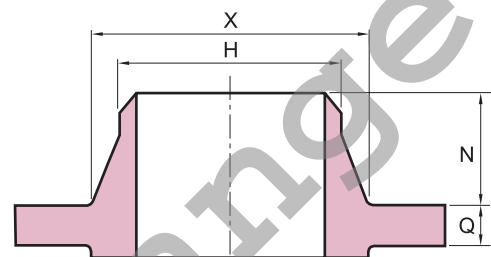

WELDING NECK

Unit : mm

Nominal Flange Size	Outside Diameter of Flange From Which Reduction is Being Made							Smallest Size Bore or Tapping Requiring Hub Flange
	150 LBS Standard	300 LBS Standard	400 LBS Standard	600 LBS Standard	900 LBS Standard	1500 LBS Standard	2500 LBS Standard	
3/4	98.5	117.5	117.5	117.5	130.0	130.0	139.7	1/2
1	108.0	124.0	124.0	124.0	149.4	149.4	158.8	1/2
1 1/4	117.5	133.5	133.5	133.5	158.8	158.8	184.2	1/2
1 1/2	127.0	155.5	155.5	155.5	177.8	177.8	203.2	1/2
2	152.5	165.0	165.0	165.0	215.9	215.9	235.0	1
2 1/2	178.0	190.5	190.5	190.5	244.3	244.3	266.7	1 1/4
3	190.5	209.5	209.5	209.5	241.3	266.7	304.8	1 1/4
3 1/2	216.0	228.5	228.5	228.5	-	-	-	1 1/2
4	228.5	254.0	254.0	273.0	292.1	311.2	355.6	1 1/2
5	254.0	279.5	279.5	330.0	349.3	374.7	419.1	1 1/2
6	279.5	317.5	317.5	355.5	381.0	393.7	482.6	2 1/2
8	343.0	381.0	381.0	419.0	470.0	482.6	552.5	3
10	406.5	444.5	444.5	508.0	546.1	584.2	673.1	3 1/2
12	482.5	520.5	520.5	559.0	609.6	673.1	762.0	3 1/2
14	533.5	584.0	584.0	603.5	641.4	749.3	-	3 1/2
16	597.0	647.5	647.5	686.0	705.0	825.5	-	4
18	635.0	711.0	711.0	743.0	787.4	914.4	-	4
20	698.5	774.5	774.5	813.0	857.3	984.3	-	4
24	813.0	914.5	914.5	940.0	1041.4	1168.4	-	4

NOTE : For reductions to sizes smaller than shown, Blind Flanges are tapped or bored for specified nominal pipe size.